

EPA-92064

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2001 (19.04.2001)


PCT

(10) International Publication Number
WO 01/28125 A1

- (51) International Patent Classification?: H04B 7/005, H03G 3/30
- (21) International Application Number: PCT/IL00/00640
- (22) International Filing Date: 11 October 2000 (11.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/417,077 13 October 1999 (13.10.1999) US
- (71) Applicant (for all designated States except US): D.S.P.C. TECHNOLOGIES LTD. [IL/IL]; Ben Gurion Street 11, 51905 Givat Shmuel (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): FRYDMAN, Javier [IL/IL]; Lev Hasharon Street 43, 42823 Tzoran (IL). SCHWARTZ, Erez [IL/IL]; Nahal Kane Street 3, 44245 Kfar Saba (IL).
- (74) Agent: SINAI, Henry; Eitan, Pearl, Latzer & Cohen-Zedek, Gav Yam Center 2, Shenkar Street 7, 46725 Herzlia (IL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.

[Continued on next page]

(54) Title: CONTROL OF TRANSMISSION POWER IN A COMMUNICATION SYSTEM

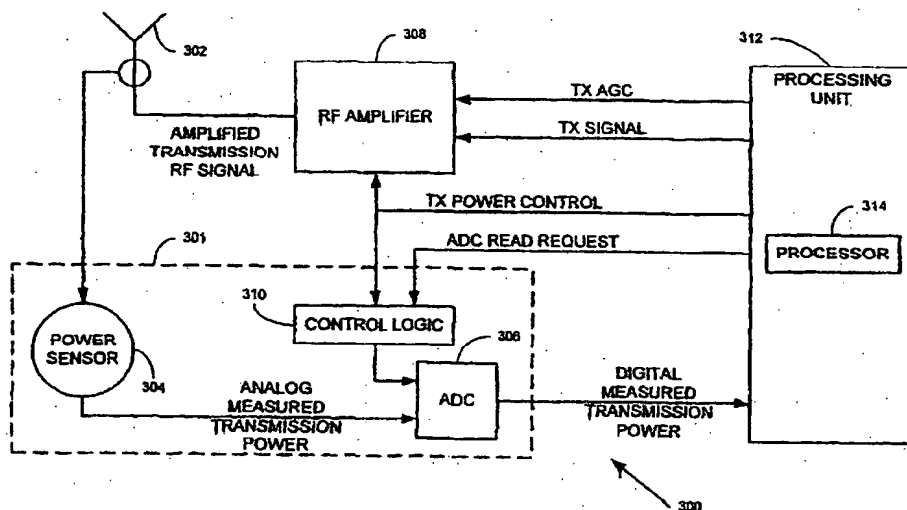

(57) Abstract: A system for controlling transmission power of a transmitter in a pseudo-random gated output power digital communication system includes a power measurement unit for producing a transmission power measurement only when transmission is enabled, and a processing unit for comparing the transmission power measurement to a desired power and for determining a power setting of the transmitter. A method for controlling the transmission power of a transmitter in a pseudo-random gated output power digital communication system includes the steps of comparing a measured transmitted power at an antenna to a desired power only when transmission is enabled, and adjusting a power setting of the transmitter according to the difference between the measured transmitted power and the desired power.

WO 01/28125 A1

WO 01/28125 A1



— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTROL OF TRANSMISSION POWER IN A COMMUNICATION SYSTEM

The present invention relates to digital communication systems, in
5 general, and to controlling the transmission power of such systems, in particular.

BACKGROUND OF THE INVENTION

Batteries are used for powering digital communication transmitters in
mobile stations such as cellular handsets. It is desirable to reduce the power
consumption of the mobile station as much as possible in order to enable the use
10 of lighter batteries.

When transmitting a signal, the power of the transmitted radio frequency
(RF) signal ("transmission power") must be within a range defined by the digital
communications standard and selected by the base station. Reference is now
made to Figs. 1A and 1B, which are schematic illustrations of prior art
15 transmission power levels. The permissible transmission power varies between
the values of MAX_POWER and MIN_POWER, thereby defining a range R. An
error range E expresses the possible discrepancy between the desired
transmission power and the actual transmission power at the antenna. Many
factors affect the size of this error range E. For example, the inherent inaccuracy
20 of the RF amplifier that converts and amplifies the digital transmission signal has
an inherent inaccuracy due to temperature fluctuations, instability of its power
supply and frequency response flatness. An additional factor is the lack of

impedance matching between the antenna and the RF amplifier. Typically, the error range E can be as large as 3 dB.

Fig. 1A shows an attempt to set the desired transmission power too low. Since the error range E is large, the actual transmission power at the antenna may be less than the limit MIN_POWER. This is unacceptable.

As shown in Fig. 1B, in order not to exceed the limits MAX_POWER and MIN_POWER of the range R, conventional prior art transmission systems set the desired transmission power setting to the mean power of the range, MEAN_POWER. Clearly, transmission at the mean power of the range R consumes more power than transmission at powers in the lower half of the range R. It would be beneficial to create a system and method for transmitting at a power which is within the range R and yet is lower than the mean power, MEAN_POWER.

The following patents and patent applications describe a variety of devices and methods for controlling or monitoring the transmission power in a communication system.

US Patent 5,832,373 to Nakanishi et al. discloses a digital power control device in a time division multiple access (TDMA) system. The device measures the actual transmitted power at the antenna and with a digital feedback loop, adjusts the gain of the RF amplifier. The digital feedback loop is synchronized with predetermined transmission bursts. US Patent 5,752,172 to Matero discloses an analog loop with a comparator for maintaining a given level of power in a transmitted signal, based on measurement of the actual transmitted power at the antenna.

US Patent 5,323,239 to Keane discloses a digitally-assisted power-leveling circuit for an RF power generator. US Patent 5,574,991 to Miyama et al. discloses a transmission power control circuit. US Patent 5,564,084 to Hirasawa discloses a transmission power level monitoring apparatus employed in a TDMA (time division multiple access) communication system.

US Patent 5,287,555 to Wilson et al. discloses power control circuitry for a TDMA radio frequency transmitter. US Patent 5,564,086 to Cygan et al. discloses a method and apparatus for enhancing an operating characteristic of a radio transmitter. EP 0416 613 A2 to Toda, assigned to Fujitsu, discloses a transmission power control circuit. EP 0462 952 A1 to Larsson et al., assigned to Ericsson, discloses a method for regulating power in a digital mobile telephony system.

There are several advanced digital communication systems using pseudo-random or random gated output power ("pseudo-random bursts"), for example, IS-95, wideband code division multiple access (W-CDMA), CDMA2000, both frequency division duplex (FDD) and time division duplex (TDD) modes. None of the above-mentioned references is capable of controlling the power of the transmitted RF signal in such systems. It will be appreciated that in such a system, not only is the timing of the transmission random, but the strength of the transmission cannot be anticipated.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the appended drawings

5 in which:

Figs. 1A and 1B are schematic illustrations of prior art transmission power levels;

Fig. 2 is a schematic illustration of the transmission power levels, in accordance with a preferred embodiment of the present invention;

10 Fig. 3 is a simplified block diagram illustration of a system for controlling transmission power, in accordance with a preferred embodiment of the present invention; and

Fig. 4 is a schematic flowchart illustration of a method for controlling transmission power using the system of Fig. 3, in accordance with a preferred
15 embodiment of the present invention.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

Embodiments of the present invention provide a system and method for controlling the power of a transmitted radio frequency (RF) signal in a pseudo-random, gated output power communication system. In the specification and claims, the meaning of the term "pseudo-random" is extended to include also the term "random".

Reference is now made to Fig. 2, which is a schematic illustration of the transmission power levels, in accordance with a preferred embodiment of the present invention. The system of the present invention has a smaller error range E' than the error range E of Figs. 1A and 1B. Since the error range has been reduced, the desired transmission power can be set to a level that is lower than the mean power `MEAN_POWER` of the range, while ensuring that the limits `MAX_POWER` and `MIN_POWER` are not exceeded.

Reference is now made to Fig. 3, which is a simplified block diagram illustration of a system for controlling transmission power, generally referenced 300, in accordance with a preferred embodiment of the present invention. The system 300 comprises an antenna 302, a power measurement unit 301, a radio frequency (RF) amplifier 308 and a processing unit 312. The power measurement unit 301 comprises a power sensor 304, an analog to digital converter (ADC) 306 and a control logic unit 310.

The power sensor 304 measures the power of the transmitted signal at the antenna 302 and provides the analog measured transmission power to the ADC 306. When enabled, the ADC 306 converts the analog measured transmission power to a digital measured transmission power. The processing

unit 312 provides a transmission signal *TX SIGNAL* and a transmission automatic gain control (AGC) signal *TX AGC* to the RF amplifier 308. The processing unit 312 also provides a transmission power control signal *TX POWER CONTROL* to the RF amplifier 308 and to the control logic unit 310. In addition, the processing unit 312 provides an ADC read request signal *ADC READ REQUEST* to the control logic unit 310.

The transmission signal *TX SIGNAL* is a continuous stream of data that contains the information to be transmitted. The transmission power control signal *TX POWER CONTROL* controls when the RF amplifier 308 transmits the transmission signal *TX SIGNAL*. In a particular implementation of a system using burst transmission, for example, a high transmission power control signal causes the RF amplifier 308 to transmit the transmission signal, while a low transmission power control signal causes the RF amplifier 308 to block transmission of the transmission signal. In a pseudo-random gated output power system, the transmission power control signal changes its value with pseudo-random timing. The RF amplifier 308 amplifies the transmission signal *TX SIGNAL* by a factor ("gain") defined in the transmission AGC signal *TX AGC*.

The control logic unit 310 synchronizes the operation of the ADC 306 with the transmission power control signal *TX POWER CONTROL*. The ADC 306 also takes into account the time constant of the power sensor 304, because the power sensor 304 has converged to its final value by the time the ADC 306 samples the value. Therefore, the conversion of the measured transmission power is performed only when the transmission is enabled through the transmission power control signal *TX POWER CONTROL* and the power level of the power sensor

304 is stable. Since the conversion of the measured transmission power is synchronized with the transmission power control signal *TX POWER CONTROL*, the system 300 is suitable for use even with pseudo-random bursts or power changes.

5 The control logic unit 310 performs logical operations to determine the correct moment when the ADC 306 should be enabled. For example, a simple AND gate could be implemented. The control logic unit 310 can also look for different conditions, for example measuring power leakage and detecting malfunctions, when the transmission power signal *TX POWER CONTROL* is off.

10 According to another preferred embodiment of the present invention, the control logic unit 310 synchronizes the operation of the ADC 306 both with the transmission power control signal *TX POWER CONTROL* and with the ADC read request signal *ADC READ REQUEST*. The ADC 306 also takes into account the time constant of the power sensor 304. In this embodiment, the conversion of the
15 measured transmission power is performed only when the transmission is enabled through the transmission power control signal *TX POWER CONTROL*, an ADC read request is pending and the power level of the power sensor 304 is stable.

20 It will be appreciated that the system 300 is a closed loop system having a feedback loop with the ADC 306. The processing unit 312 sets the transmission AGC signal *TX AGC* according to the digital measured transmission power in order to produce the desired transmission power at the antenna 302. The accuracy of the feedback loop is based upon the inherent accuracy of the power

sensor 304, which is typically around 0.2 dB over the entire RF frequency range and 0.2 dB over the temperature range -30°C – 85°C.

Reference is made additionally to Fig. 4, which is a schematic flowchart illustration of a method for controlling transmission power using the system of Fig. 3, in accordance with a preferred embodiment of the present invention. The processing unit 312 sets the gain of the RF amplifier 308 via the AGC signal *TX AGC* (step 400). If the transmission power control signal *TX POWER CONTROL* enables transmission (step 402), then the RF amplifier 308 amplifies the transmission signal *TX SIGNAL* and transmits the RF signal via the antenna 302 (step 404). The power sensor 304 measures the power of the transmitted RF signal at the antenna 302 (step 406). If the transmission power control signal *TX POWER CONTROL* enables transmission, if there is an ADC read request pending, and if the power sensor 304 is stable (step 408), then the ADC 306 converts the measured transmission power to a digital value and provides it to the processing unit 312 (step 410). The processing unit 312 uses the digital measured transmission power to determine a new desired gain of the RF amplifier 308 (step 412), and then the method returns to step 400.

The ADC read requests are issued by the processing unit 312 according to various factors. For example, the ADC read requests might be more frequent as the temperature rises. In another example, the ADC requests may be more frequent at transmission frequencies where the RF amplifier 308 is known to be less accurate. In a preferred embodiment of the present invention, the processing unit 312 comprises a processor 314, for example, but not limited to, a digital signal processor (DSP), which determines when to issue the ADC read requests.

The processing unit 312 can be self-learning, so that ADC read requests are issued based on properties characterizing cases where measured transmitted power varies from the set transmitted power by more than a predetermined tolerance. Furthermore, using the processor 314, the processing unit 312 can
5 save values of the transmission AGC signal TX AGC along with scenario data related to the measured transmitted power and the transmitted power that was set. Then, when the processing unit 312 identifies a particular scenario, it can adjust the transmission AGC signal TX AGC according to the saved values.

The methods and apparatus disclosed herein have been described
10 without reference to specific hardware or software. Rather, the methods and apparatus have been described in a manner sufficient to enable persons of ordinary skill in the art to readily adapt commercially available hardware and software as may be needed to reduce any of the embodiments of the present invention to practice without undue experimentation and using conventional
15 techniques.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described herein above. Rather the scope of the invention is defined by the claims that follow.

What is claimed is:

1. A method comprising:

comparing a measured transmitted power at an antenna to a desired power only when transmission is enabled; and

5 adjusting a power setting of a transmitter according to the difference between said measured transmitted power and said desired power.

2. A method according to claim 1, wherein said desired power is set lower than the mean power of an allowed range of transmission powers.

3. A method according to claim 1, wherein said comparing is performed only
10 when said transmitter issues a read request.

4. A method according to claim 3, wherein said transmitter issues said read request according to previous measurements of transmitted power and factors characterizing said transmitter when said previous measurements were made.

5. A system comprising:

15 a power measurement unit adapted to produce a transmission power measurement only when transmission is enabled; and

a processing unit adapted to compare said transmission power measurement to a desired power and adapted to determine a power setting of a transmitter.

20 6. A system according to claim 5, wherein said desired power is set lower than the mean power of an allowed range of transmission powers.

7. A system according to claim 5, wherein said transmitter has an antenna, and said power measurement unit comprises:

a power sensor adapted to measure transmission power at said antenna, thereby producing an analog measurement;

an analog to digital converter adapted to convert said analog measurement to said transmission power measurement; and

5 a control logic unit adapted to enable operation of said analog to digital converter only when transmission is enabled.

8. A system according to claim 7, wherein said processing unit comprises a processor adapted to issue a read request, and wherein said control logic unit is adapted to enable operation of said analog to digital converter only when said
10 processor issues said read request.

9. A system according to claim 8, wherein said processor issues said read request according to previous measurements of transmitted power and factors characterizing said transmitter when said previous measurements were made.

1/3

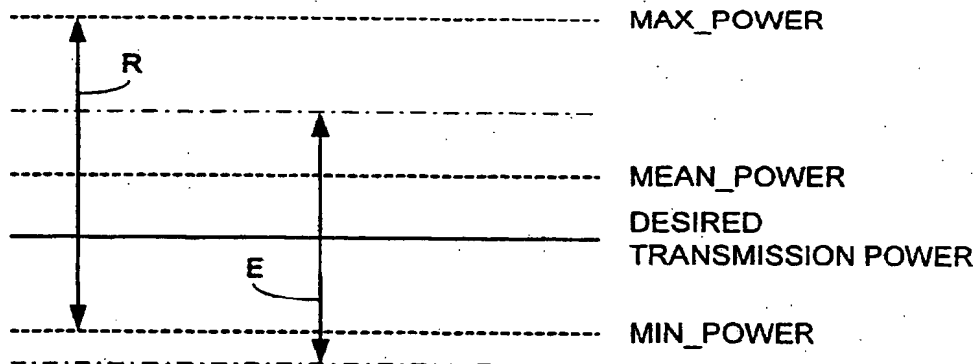


FIG. 1A
PRIOR ART

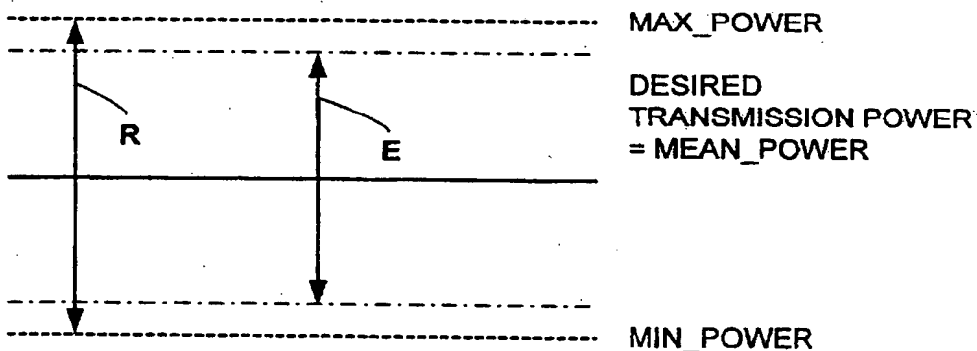


FIG. 1B
PRIOR ART

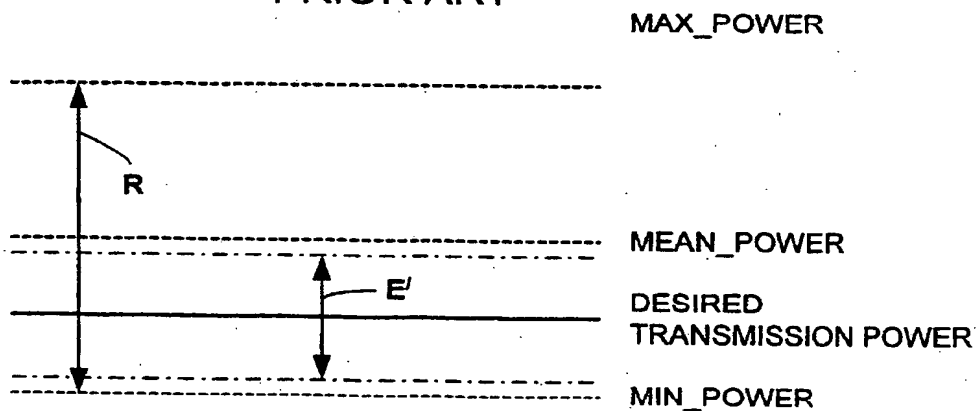


FIG. 2

2/3

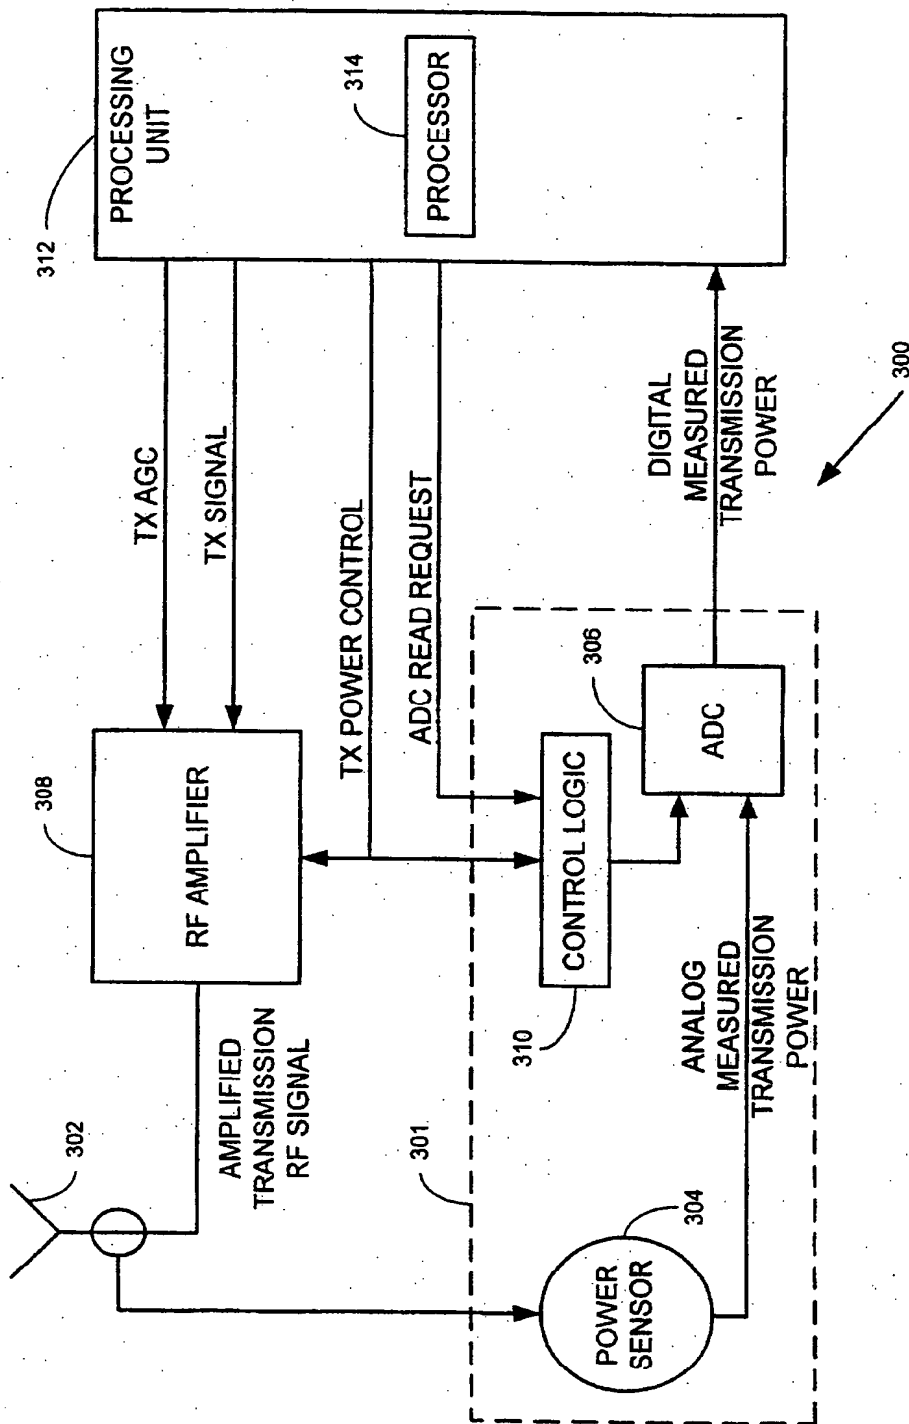


FIG. 3

3/3

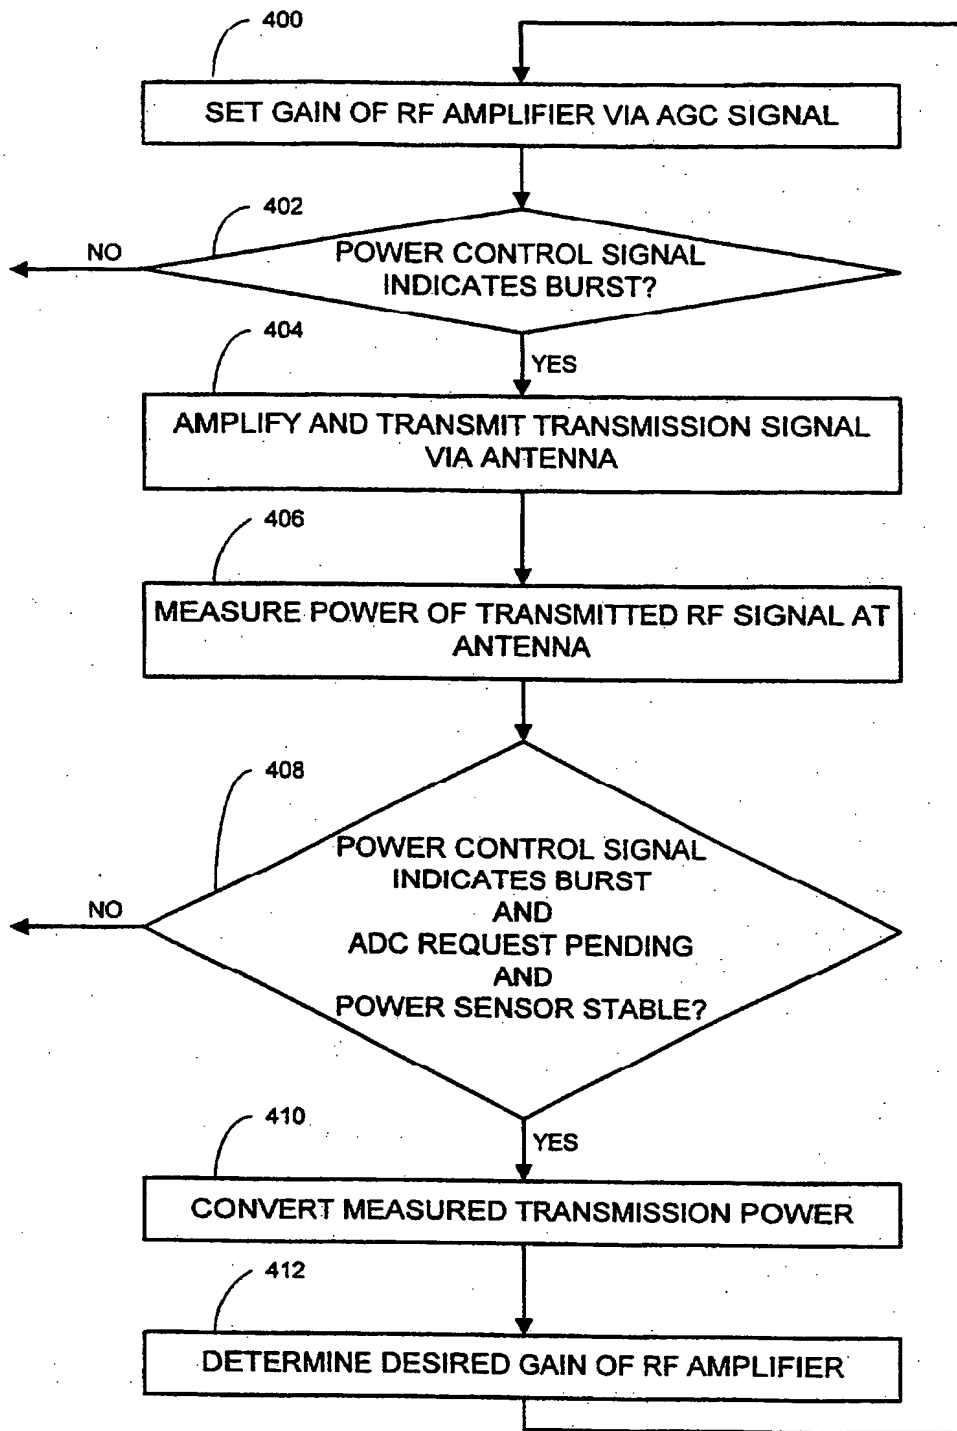


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL 00/00640

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/005 H03G3/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04B H03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 438 683 A (TSIEN CHIH C ET AL) 1 August 1995 (1995-08-01)	1,2,5,6
A	abstract; figures 1,5 column 4, line 11 - line 24 column 7, line 6 - line 39 ---	3,4,7-9
A	US 5 054 116 A (DAVIDSON MARK N) 1 October 1991 (1991-10-01) abstract; figure 2 column 5, line 32 - last line ---	1,2,5-7
A	EP 0 688 109 A (NOKIA MOBILE PHONES LTD) 20 December 1995 (1995-12-20) abstract; figures 1,3 column 1, line 18 -column 2, line 5 ---	1,2,5-7
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

*** Special categories of cited documents:**

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

21 March 2001

Date of mailing of the international search report

29/03/2001

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sieben, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 00/00640

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 832 373 A (ONODERA TETSUO ET AL) 3 November 1998 (1998-11-03) cited in the application abstract; figures 2,3 column 2, line 4 - line 29</p>	1-3,5-8

1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL 00/00640

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5438683	A	01-08-1995	CA	2088813 A	03-09-1993
US 5054116	A	01-10-1991	DE	4024799 A	11-04-1991
			GB	2236636 A,B	10-04-1991
EP 0688109	A	20-12-1995	FI	942839 A	16-12-1995
			JP	8084113 A	26-03-1996
			US	5675611 A	07-10-1997
US 5832373	A	03-11-1998	JP	8274559 A	18-10-1996
			WO	9631954 A	10-10-1996

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.